


# NOVA 24"

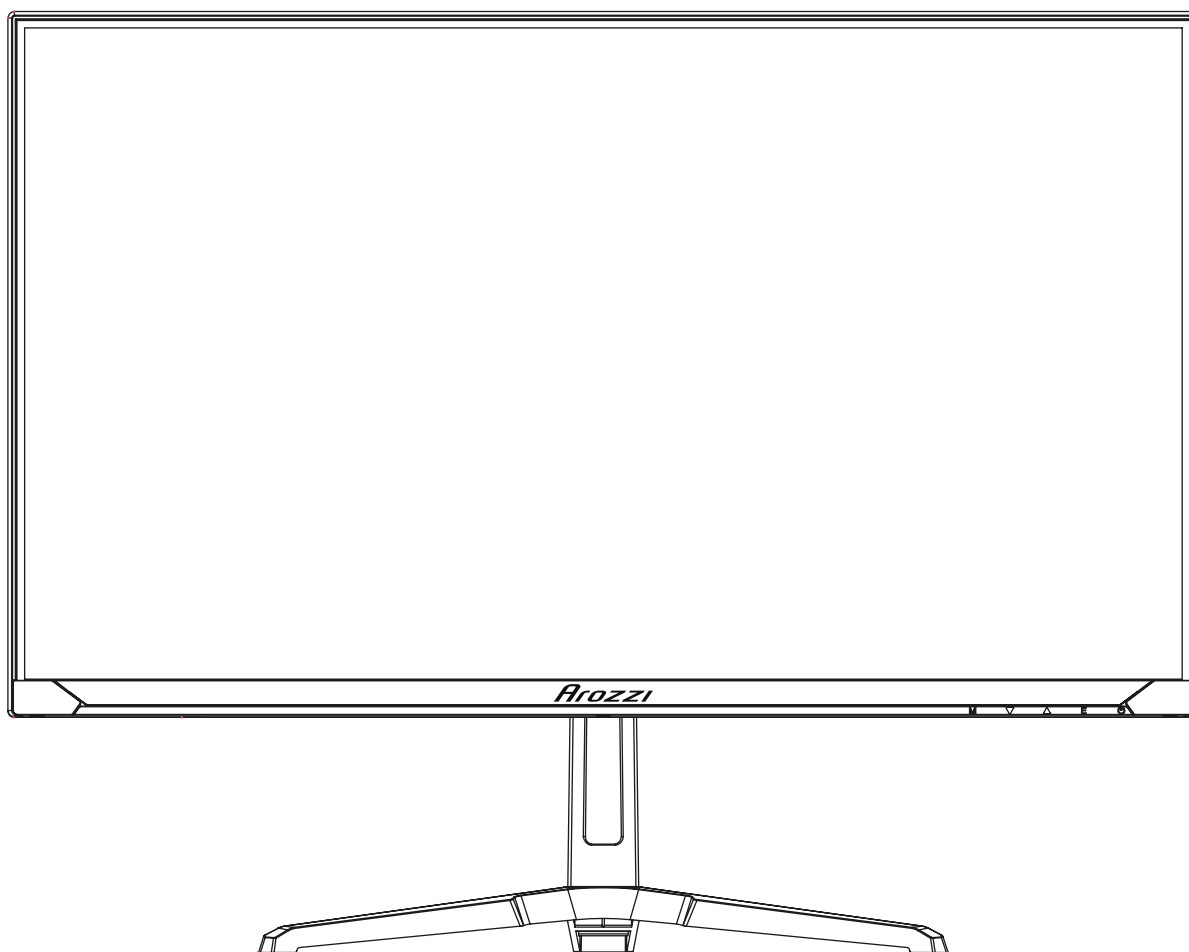

# WARNINGS

## POWER

- Only use the power unit provided to power the device.
- Check mains rating before plugging the power unit in.
- Do not pull on the cable to unplug the device.
- Turn Off the device before unplugging.

## SAFETY PRECAUTIONS

- Keep the device away from rain and humidity to prevent risk of fire and electrocution.
- Do not introduce material (solid or liquid) inside. If this should accidentally occur, disconnect the device from power and have it inspected by qualified personnel.
- Keep the device away from children, to prevent accidental damage.
- Do not touch the device with wet hands to prevent electrical shock or mechanical damage.
- Do not use the device if it should fall or the external casing is damaged. Risk of electrocution if the device is used in such conditions.
- It is advisable to disconnect the device from power if the monitor is not used for a certain time.
- Never open the device. In all cases, contact Arozzi for repairs.

## INSTALLATION PRECAUTIONS

- To prevent the device from overheating, arrange it in a position that allows the flow of air to enter through the slots in the casing.
- Do not install near sources of heat, such as radiators or hot air ducts.
- Slots and openings in the cabinet are provided for ventilation. These openings must not be blocked or covered: risk of fire, electrocution and mechanical failure.
- Keep away from direct sunlight.
- Do not use the device in presence of smoke, vapor, humidity, dust or intense vibrations.
- Do not install this device on an unstable surface, such as a wobbly or slanted table. The device could fall causing injury or mechanical failures.
- Do not install the device in a place where it could be exposed to humidity or water.
- Do not direct a jet of water onto the device: risk of fire, electrocution or mechanical failure.
- Stop using the device if water or other material should penetrate inside: risk of fire and electrocution.
- Do not place heavy or heat-generating objects on top of the device: this could damage the casing and/or increase internal temperature causing faults.
- Keep magnets and magnetized objects away from the device to prevent faults.
- Wait for a while before operating a device after transporting it from a cold place to a warm place and vice versa. Wait on average for about three hours: this will allow the device to adapt to the new ambient (temperature, humidity, etc.).

The monitor is provided with a metal base and rubber feet. It can be positioned on a horizontal surface, such as a desk or a table. Make sure that the device is fastened firmly and that it is not resting on unstable supports or surfaces. Dropping could cause severe injury and damage the device.

Remember to adjust the brightness and contrast to obtain a perfect image.

## CLEANING THE DEVICE

Use a dry cloth to remove dust and dirt. Dip the cloth in neutral detergent if dirt cannot be eliminated with a dry cloth alone. Do not use volatile liquids (such as petrol, alcohol, solvents, etc.) or chemically treated clothes to clean the device to prevent deformation, deterioration or scratches to the paint finish.

## PRIVACY AND COPYRIGHT

This monitor is a device for Gaming, Content creation or Media consumption.

Recording of images is subject to the laws in force in your country.

Recording of images protected by copyright is forbidden.

Product users shall be responsible for checking and respecting all local rules and regulations concerning monitoring and recording video signals. The manufacturer SHALL NOT BE LIABLE for use of this product not in compliance with the laws in force.




[youtube.com/@ArozziSupport](https://youtube.com/@ArozziSupport)




EU: [arozzi.se/support/](https://arozzi.se/support/)  
US: [arozzi.com/support/](https://arozzi.com/support/)  
Elsewhere: [arozzi.se/support/](https://arozzi.se/support/)

# PACKING LIST




**Monitor**




**Stand**




**VESA Adapter + Screws**



**User Manual**





**Power Adapter**



**HDMI Cable**

---

## MONITOR INPUTS

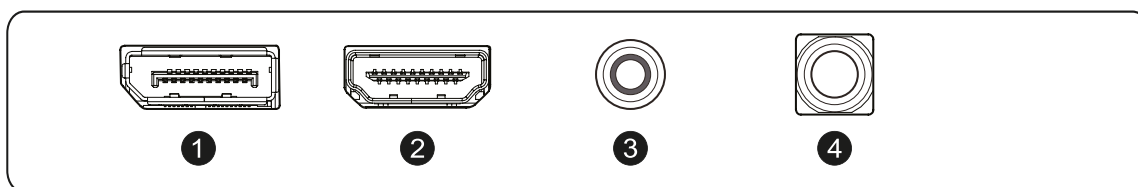


- ❶ DP (Support FHD 200Hz, HDR, AdaptiveSync, OD, MPRT)
- ❷ HDMI (Support FHD 200Hz, HDR, AdaptiveSync, OD, MPRT)
- ❸ Audio Out
- ❹ Power (DC 12V, 3A )


**Warning:** Always use the appropriate power cord.

# ASSEMBLY WITH STAND


1

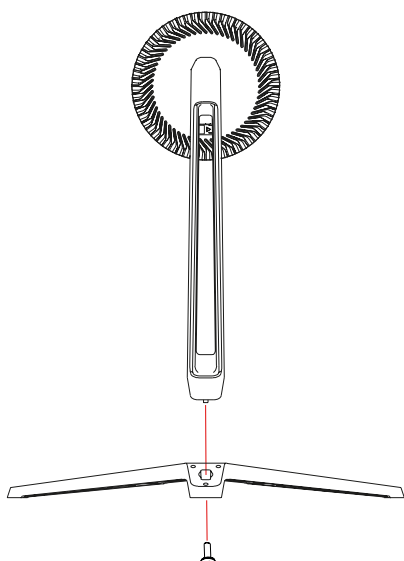


2

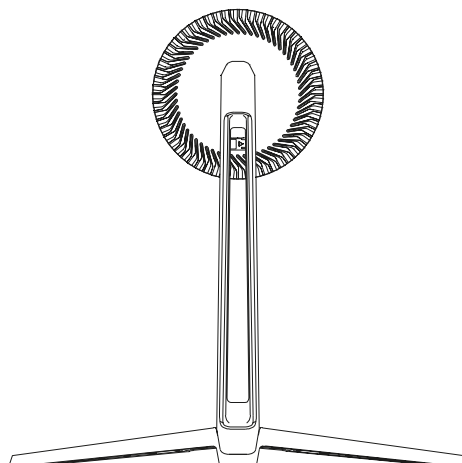

3

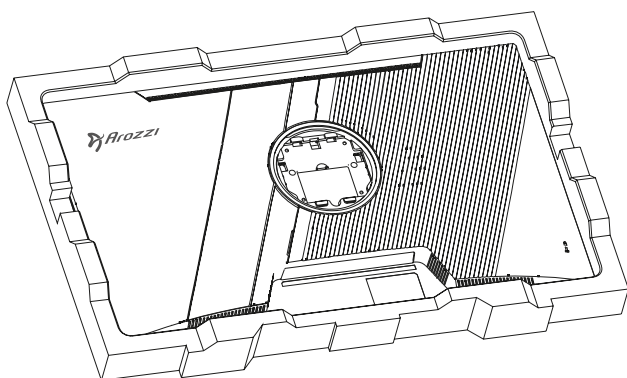


4

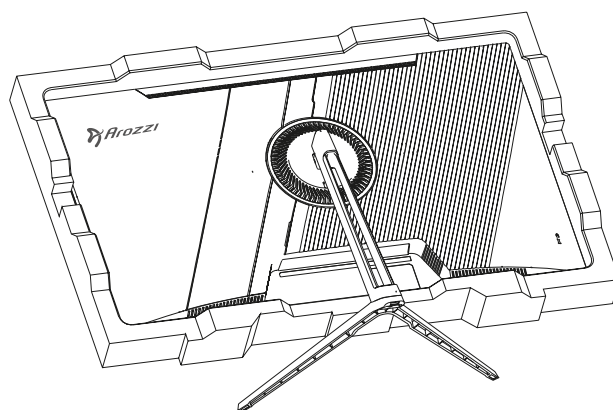


Keep the monitor in the foam until it's been fully assembled.

# ASSEMBLY WITH VESA ADAPTER


1

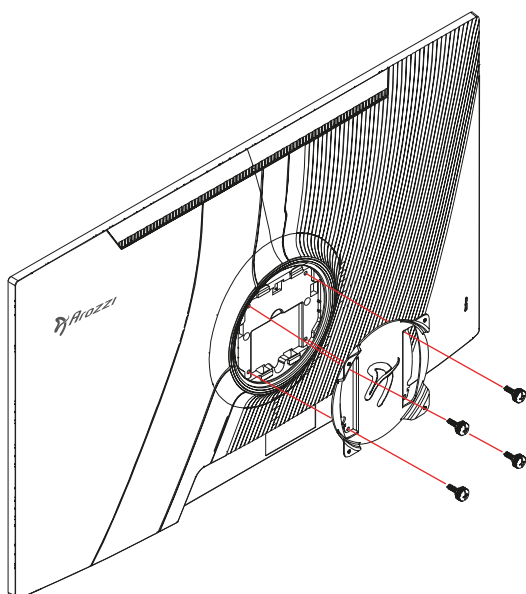

2

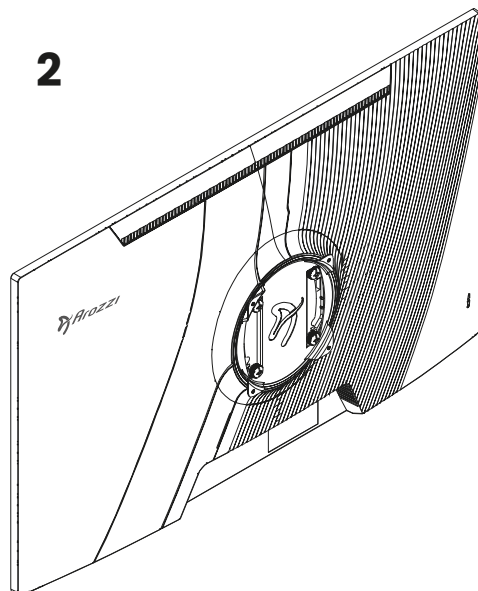


# CONTROL PANEL

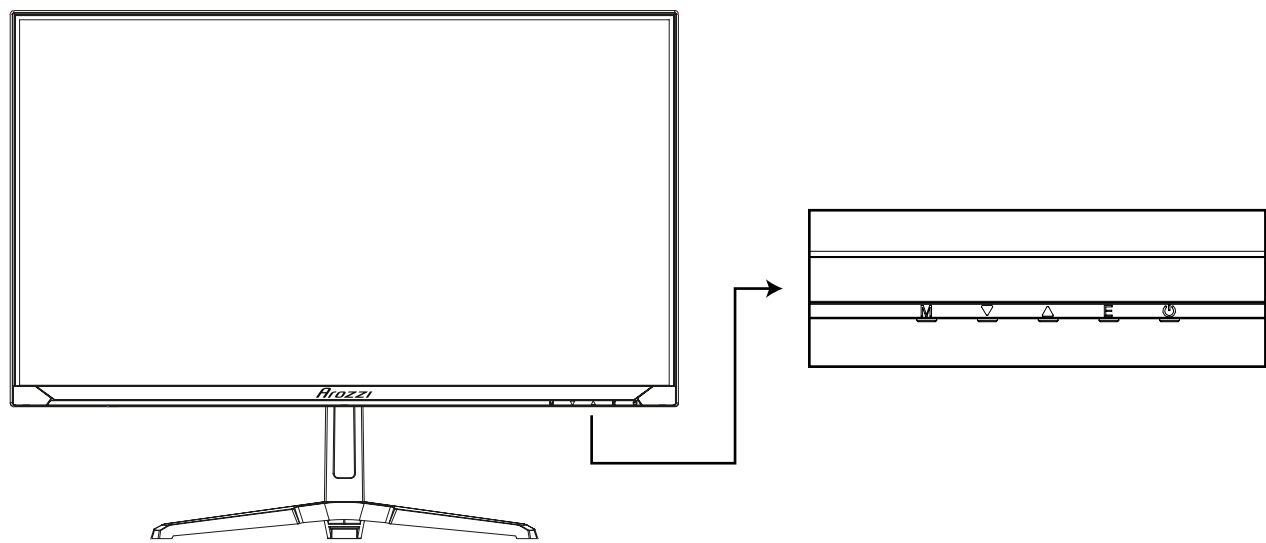

| Monitor Button | Action                                                               |
|----------------|----------------------------------------------------------------------|
| M              | Open the main OSD menu / select submenu.                             |
| ▼              | Go down in the main OSD menu / decrease the value of a selected item |
| ▲              | Go up in the main OSD menu / increase the value of a selected item   |
| E              | Select signal source / exit OSD.                                     |
| ⏻              | Power ON / OFF the monitor.                                          |

# INITIAL SETUP

- Connect the monitor to a power outlet. Check mains rating before plugging the power unit in.
- Press the POWER button on the monitor to turn it on (The indicator will be blue).
- Connect the relevant image signal cable to the corresponding input on the monitor.  
The source will be automatically detected.
- To change between inputs, press the “ E ” button to enter the source menu. Use the ▲ and ▼ buttons to choose the input source between DP and HDMI.
- If the monitor cannot find a signal on the chosen input, it will auto-select the input where a signal is present.

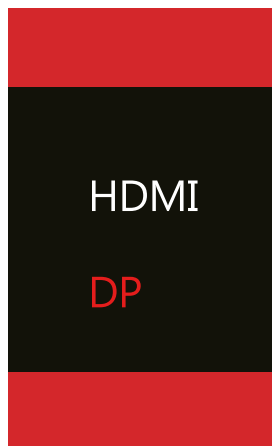


# OSD MENU

## Input Source



Switch the signal input to HDMI / DP.  
No signal results in auto-select.

## Brightness / Contrast

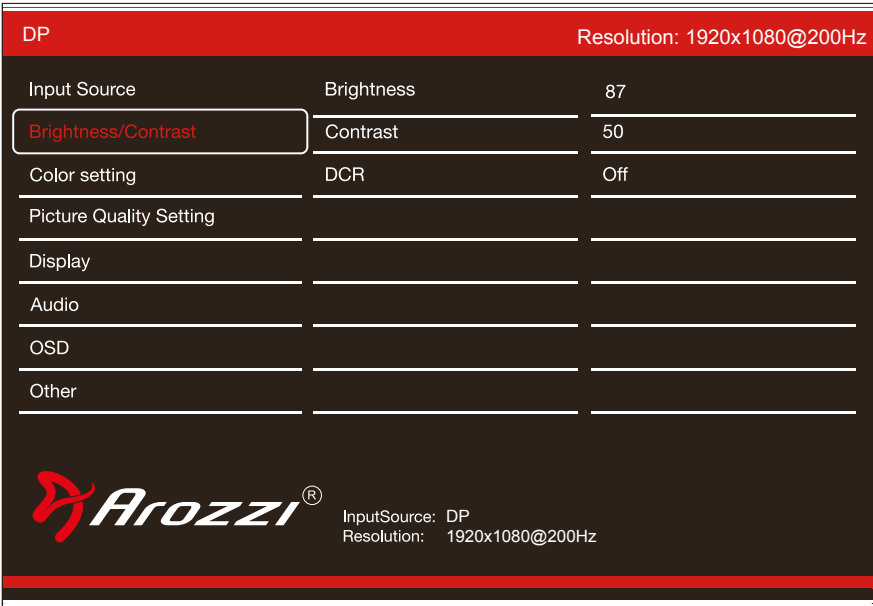

- Brightness** ..... Change the display Brightness value from 0 to 100.
- Contrast**..... Adjust the display Contrast value from 0 to 100.
- DCR** ..... Turn the Dynamic Contrast Ratio feature On or Off.

## Color Settings

| DP                      |                   | Resolution: 1920x1080@200Hz |
|-------------------------|-------------------|-----------------------------|
| Input Source            | Gamma             | 2.2                         |
| Brightness/Contrast     | Picture Mode      | Standard                    |
| Color setting           | Color Temperature | Warm                        |
| Picture Quality Setting | Hue               | 50                          |
| Display                 | Saturation        | 50                          |
| Audio                   | Low Blue Light    | 0                           |
| OSD                     |                   |                             |
| Other                   |                   |                             |

 InputSource: DP  
Resolution: 1920x1080@200Hz

- Gamma** ..... Change the display Gamma value to: 2.0, 2.2, 2.4.
- Picture Mode** ..... Change the Picture Mode to: Standard, Photo, Game, Movie, FPS, RTS.
- Color Temperature** .... Change the Color Temperature to: Normal, Warm, Cool, User.
- Hue** ..... Change the display Hue value from 0 to 100.
- Saturation** ..... Change the display Saturation value from 0 to 100.
- Low Blue Light** ..... Change the display Low Blue Light value from 0 to 100.

## Picture Quality Settings

| DP                      |               | Resolution: 1920x1080@200Hz |
|-------------------------|---------------|-----------------------------|
| Input Source            | Sharpness     | 50                          |
| Brightness/Contrast     | Response Time | Off                         |
| Color setting           |               |                             |
| Picture Quality Setting |               |                             |
| Display                 |               |                             |
| Audio                   |               |                             |
| OSD                     |               |                             |
| Other                   |               |                             |

 InputSource: DP  
Resolution: 1920x1080@200Hz

- Sharpness** ..... Change the display Sharpness value from 0 to 100.
- Response Time** ..... Select the Response Time value to Low, Middle, High or turn it Off.

Display Settings

|                                                                                                                                                        |              |                             |
|--------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|-----------------------------|
| DP                                                                                                                                                     |              | Resolution: 1920x1080@200Hz |
| Input Source                                                                                                                                           | Aspect Ratio | 16:9                        |
| Brightness/Contrast                                                                                                                                    |              |                             |
| Color setting                                                                                                                                          |              |                             |
| Picture Quality Setting                                                                                                                                |              |                             |
| Display                                                                                                                                                |              |                             |
| Audio                                                                                                                                                  |              |                             |
| OSD                                                                                                                                                    |              |                             |
| Other                                                                                                                                                  |              |                             |
| <div><div>InputSource: DP<br/>Resolution: 1920x1080@200Hz</div></div> |              |                             |

Aspect Ratio ..... Change the image Aspect Ratio to 16:9, Auto, 4:3, or 1:1.

Audio Settings

|                                                                                                                                                          |        |                             |
|----------------------------------------------------------------------------------------------------------------------------------------------------------|--------|-----------------------------|
| DP                                                                                                                                                       |        | Resolution: 1920x1080@200Hz |
| Input Source                                                                                                                                             | Mute   | Off                         |
| Brightness/Contrast                                                                                                                                      | Volume | 50                          |
| Color setting                                                                                                                                            |        |                             |
| Picture Quality Setting                                                                                                                                  |        |                             |
| Display                                                                                                                                                  |        |                             |
| Audio                                                                                                                                                    |        |                             |
| OSD                                                                                                                                                      |        |                             |
| Other                                                                                                                                                    |        |                             |
| <div><div>InputSource: DP<br/>Resolution: 1920x1080@200Hz</div></div> |        |                             |

Mute ..... Turn On or Off to mute the audio source.

Volume ..... Change the audio source volume from 0 to 100.

## OSD Settings

| DP                                                                                                                               |                  | Resolution: 1920x1080@200Hz |
|----------------------------------------------------------------------------------------------------------------------------------|------------------|-----------------------------|
| Input Source                                                                                                                     | Language         | English                     |
| Brightness/Contrast                                                                                                              | OSD H-Position   | 50                          |
| Color setting                                                                                                                    | OSD V-Position   | 50                          |
| Picture Quality Setting                                                                                                          | OSD Transparency | 20                          |
| Display                                                                                                                          | OSD Time Out     | 20                          |
| Audio                                                                                                                            |                  |                             |
| OSD                                                                                                                              |                  |                             |
| Other                                                                                                                            |                  |                             |
|  InputSource: DP<br>Resolution: 1920x1080@200Hz |                  |                             |

- Language** ..... Change the OSD Menu display language.
- OSD H-Position** ..... Change the horizontal position of the OSD Menu.
- OSD V-Position** ..... Change the vertical position of the OSD Menu.
- OSD Transparency** ..... Change the transparency value of the OSD Menu from 0 to 100.
- OSD Time Out** ..... Change how long the OSD Menu is on before it automatically exits.

## Other Settings

| DP                                                                                                                                 |                          | Resolution: 1920x1080@200Hz |
|------------------------------------------------------------------------------------------------------------------------------------|--------------------------|-----------------------------|
| Input Source                                                                                                                       | FreeSync (Adaptive Sync) | Off                         |
| Brightness/Contrast                                                                                                                | HDR                      | Off                         |
| Color setting                                                                                                                      | MPRT                     | Off                         |
| Picture Quality Setting                                                                                                            | LightEffect              | On                          |
| Display                                                                                                                            | Flicker Free             | On                          |
| Audio                                                                                                                              | Reset                    |                             |
| OSD                                                                                                                                |                          |                             |
| Other                                                                                                                              |                          |                             |
|  InputSource: DP<br>Resolution: 1920x1080@200Hz |                          |                             |

- Adaptive Sync** ..... Matches the monitor refresh rate to the graphics card framerate
- HDR** ..... High dynamic range mode. HDR must also be enabled on the PC operating system.
- MPRT** ..... Reduces motion blur.
- Light Effect** ..... Turn On or Off the LED ring on the back of the monitor
- Flicker Free** ..... Reduces flickering to reduce eye strain
- Reset** ..... Restore the monitor to factory settings.

# SPECIFICATIONS

## Display

|                                     |                       |
|-------------------------------------|-----------------------|
| Screen Size                         | 23.8"                 |
| Panel Type                          | IPS                   |
| Curvature                           | Flat                  |
| Backlight Type                      | LED                   |
| Aspect Ratio                        | 16 : 9                |
| Brightness (Max.)                   | 300 cd/m <sup>2</sup> |
| Contrast Ratio (Max.)               | 1000 : 1              |
| Resolution                          | 1920x1080 @ 200Hz     |
| Response Time (Max. with OD)        | 1ms                   |
| Color Gamut                         | 99% sRGB / 77% DCI-P3 |
| Viewing Angle (Horizontal/Vertical) | 178°/178° (CR>10) IPS |
| Color Support                       | 16.7M Colors (8bit)   |

## Connections

|                 |                  |
|-----------------|------------------|
| DP (1.4)        | x1 (FHD @ 200Hz) |
| HDMI (2.0)      | x1 (FHD @ 200Hz) |
| Audio Out 3.5mm | x1               |

## Power

|                       |             |
|-----------------------|-------------|
| Power Consumption     | Typical 26W |
| Stand By Power (DPMS) | <0.5W       |
| Type                  | DC12V, 3A   |

## Features

|                     |                                               |
|---------------------|-----------------------------------------------|
| Tilt                | +5° to -15°                                   |
| HDR                 | Supported                                     |
| Adaptive Sync       | Supported                                     |
| RGB Light           | Color fade on / off                           |
| Cabinet Color       | Black / White / Pink / Purple / Forest Green  |
| Over Drive          | Supported                                     |
| Flicker Free        | Supported                                     |
| Low Blue Light Mode | Supported                                     |
| VESA mount          | 75x75 mm / 100x100 mm (With included adapter) |
| Speakers            | Built-in (2x3W)                               |